




Model No	Gauge	Liner Material	Coating Material	Color	Sizes	Length	Weight/pair
14I-1850/A7	18	Nylon+HPPE +Steel fibre	Nitrile, foam	Black/Black	6-12	22~28cm	60g(size 10)



**Features:**


- Super strong liner provides high cut resistant level, good abrasion, high dexterity
- Nitrile palm coating provides superior grip, abrasion resistance and oil resistance
- Special knit provides increased user comfort
- High flexibility
- Knit wrist helps prevent dirt and debris from entering the glove
- Launderable
- Touchscreen Compatible
- Hypoallergenic

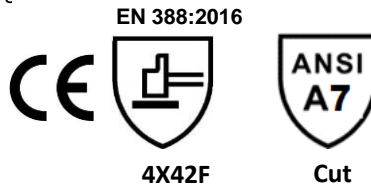

**IDEAL APPLICATION**

- \* Glass manufacturing
- \* Aeronautics & automotive
- \* Steel industry
- \* Construction and Mining
- \* Assembling metal parts and components
- \* Handling sharp or irregular-edged metal parts
- \* Plastics injection and moulding
- \* Oil & gas industry

**CERTIFICATION LEGENDS**



MECHANICAL HAZARDS  
EN388:2016

PERFORMANCE LEVELS

4 X 4 2 F

- A-F: Straight Blade Cut Resistance (EN ISO:13997)
- 1-4: Puncture Resistance
- 1-4: Tear Resistance
- 1-5: Circular Blade Cut Resistance
- 1-4: Abrasion Resistance

Remark: for cut resistant gloves, it is unnecessary to do straight blade cut test if circular blade cut test is made.  
"X" stands for "no test made"

**PACKAGE DETAILS**

- \* Inner Packing: 1 pair/polybag , 12pairs/polybag
- \* Outer Packing: 120pairs/carton
- \* Carton Size: 54\*27\*29cm
- \* G.W.: approx. 7.5kgs